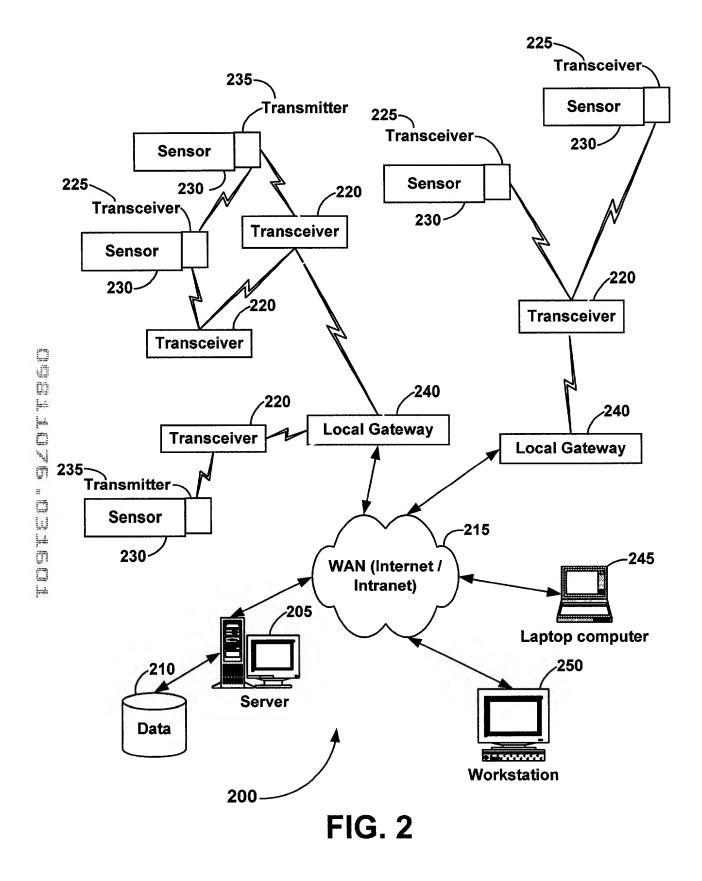


FIG. 1 (PRIOR ART)



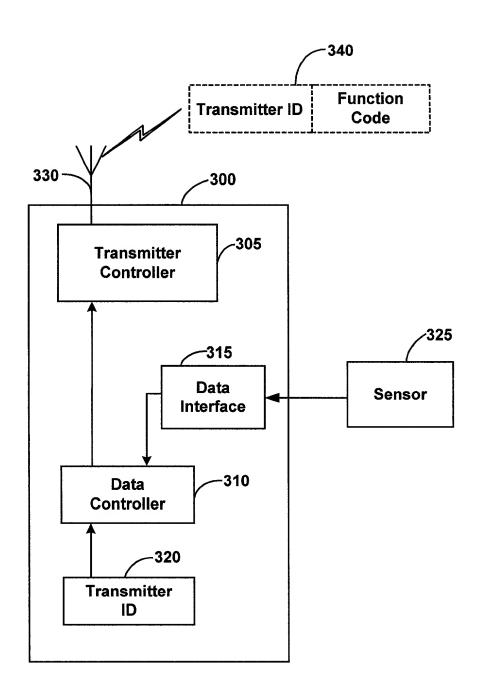


FIG. 3

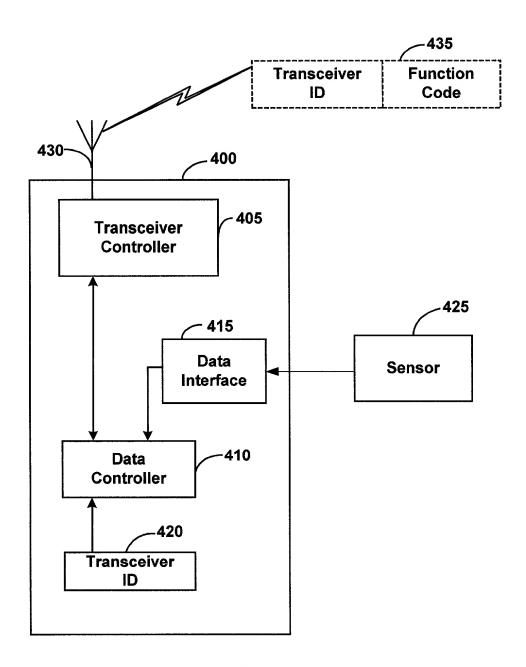


FIG. 4

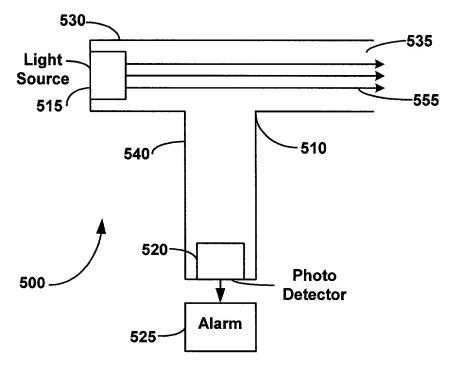
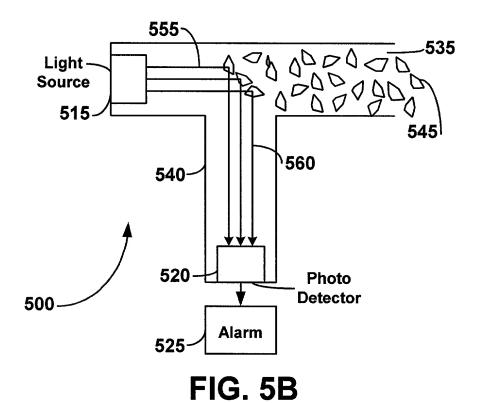


FIG. 5A



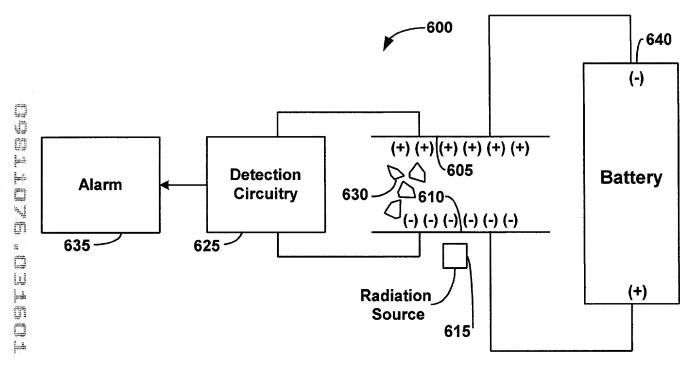


FIG. 6

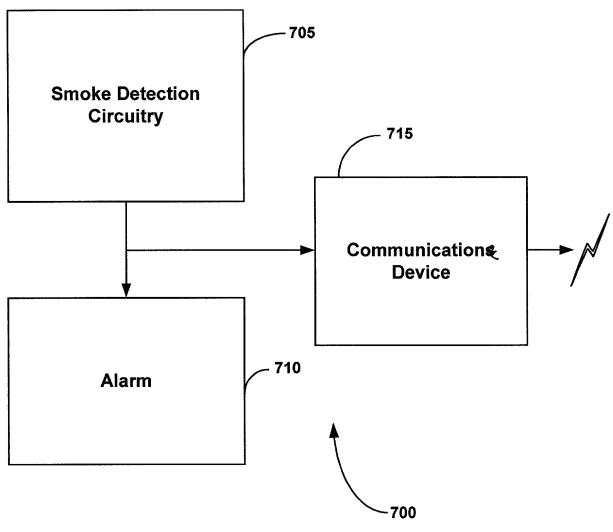


FIG. 7

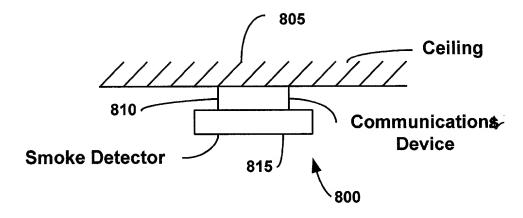


FIG. 8

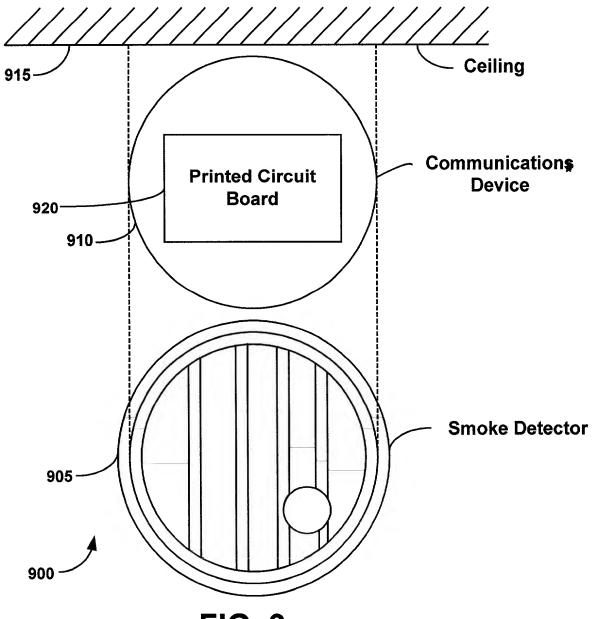
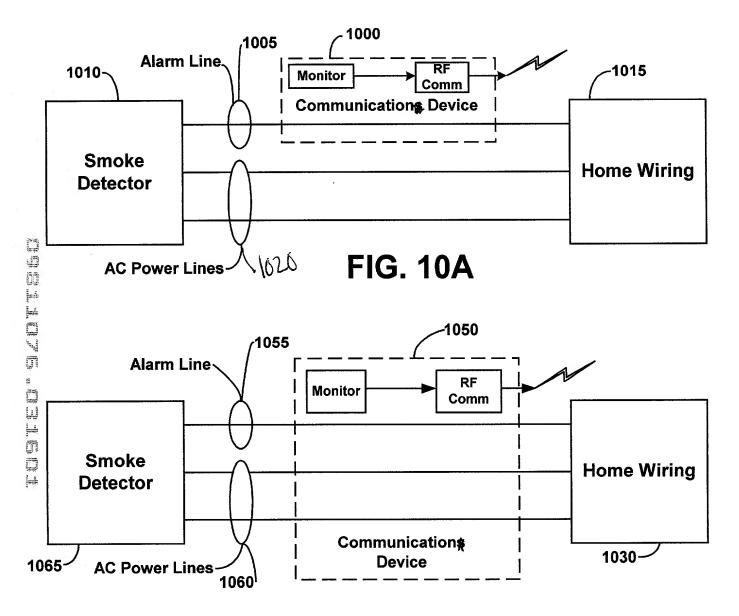
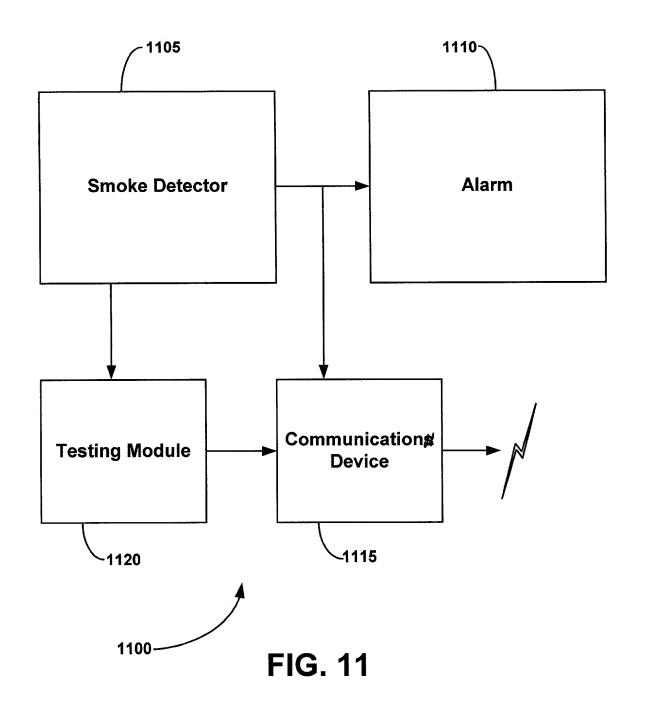


FIG. 9



**FIG. 10B** 



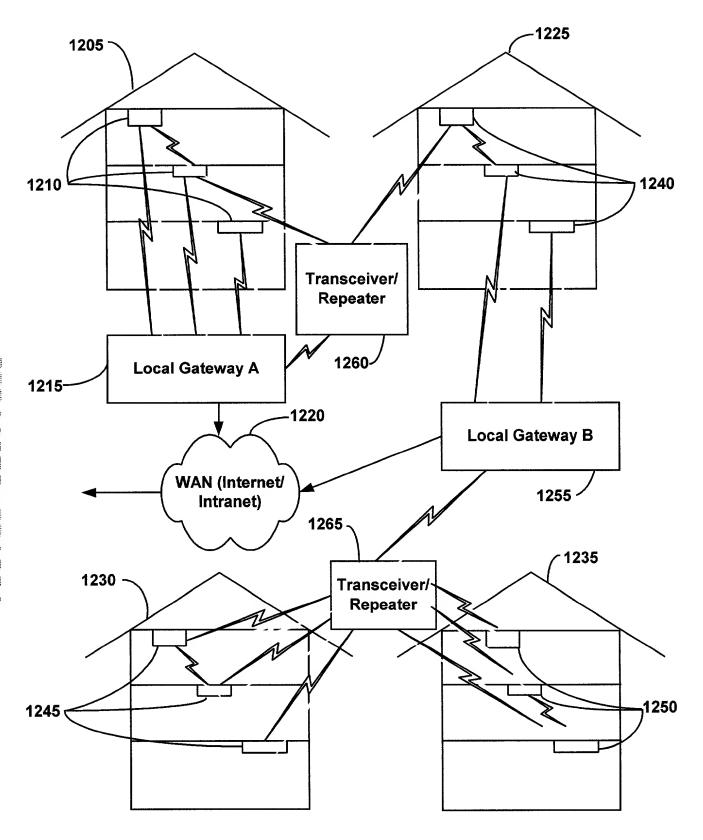


FIG. 12

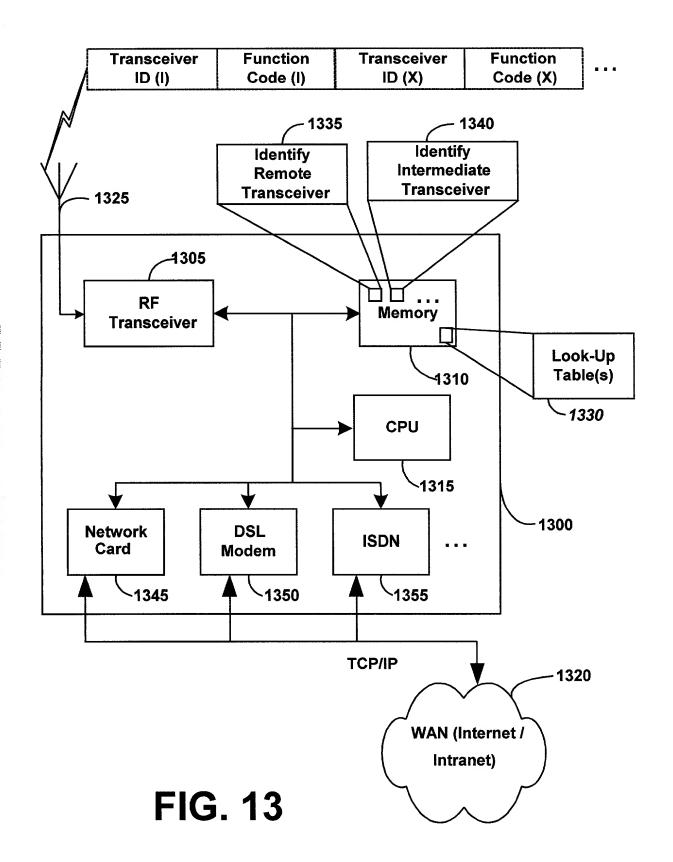


FIG. 14 MESSAGE STRUCTURE

CKH CKL	(1)
	<u>(1)</u>
Data	(0-109)
Cmd.	Ξ
Pkt. Max. Pkt. Lngth.	(E)
<u>ჯ</u>	
Max.	<del>(</del> 1
Ŗ.	
dr. Pkt. No. P	(1)
P	
To Addr. From Addr.	(9)
To Addr.	(1-6)

## Sample Messages

1500

Central Server to Personal Transceiver - Broadcast Message - FF (Emergency)

Byte Count = 12

To Addr.	From Addr.	Pkt. No.	Pkt. Max.	Pkt. Lngth.	Cmd.	CkH	CkL
(FF)	(12345678)	(00)	(00)	(0C)	(FF)	(02)	(9E)

First Transceiver to Repeater (Transceiver) Broadcast Message - FF (Emergency)

Byte Count = 17

-1510

	From Addr. (12345678)	Pkt. Max. (00)	Pkt. Lngth. (11)	Cmd. (FF)	CkH (03)	

Data (A000123456)

Note: Additional Transceiver Re-Broadcasts do not change the message.

The messages are simply received and re-broadcast.

1515

Message to Device "A0" From Device "E1" Command - "08" (Respond to PING)
Response will reverse "To" and "From" Addresses

Byte Count = 17

To Addr.	From Addr.	Р#	P Max.	P Lngth.	Cmd.	Data	CkH	CkL
(A012345678)	(E112345678)	(00)	(00)	(11)	(08)	(A5)	(04)	(67)

**FIG. 15**